

The Neostart 320 maintains batteries even deeply discharged battery.

CHARGER FUNCTION

The Neostart 320 charges 12V and 24V lead acid batteries from **20Ah to 700Ah**.

It is a traditional charger. Charging must be monitored.

STARTER FUNCTION

The Neostart 320 can start vehicles with 12V or 24V lead acid batteries from **35Ah to 120Ah**.


A pre-charge may be necessary to supply enough energy to start the vehicle.

High Power traditional starter and charger cable of instantaneous start even with deeply discharged battery.

- The Neostart 320 is protected against short circuits, polarity inversion and mains overvoltage.
- Handles for easy transportation
- Cables Ø 10 mm², (length: red & black - 2.1m)
- Externally visible and easily accessible fuse
- Large ammeter



EASY TO USE CONTROL PANEL

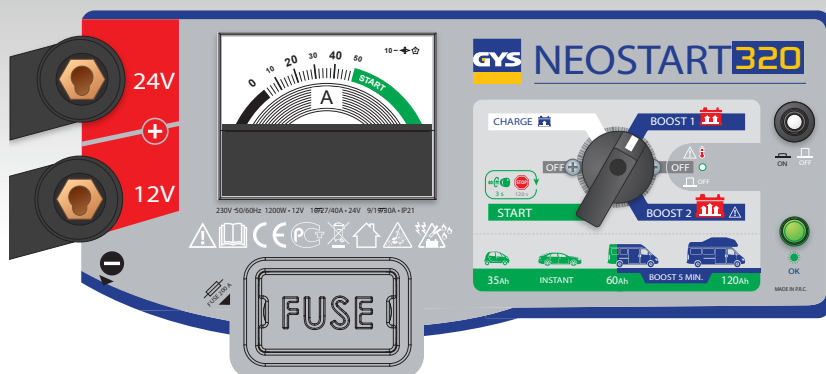

CE - EN 60335-2-29

50/60hz	I ₁	1200W	12-24V	MIN. Ah MAX. Ah	Reg	EFFICACE / RMS	MOYEN / AVERAGE	POS. MANUAL	START		Fuse	IP	cm	kg
									A 1V/C	A 0V/C				
230V	13A	1200W	12-24V	20>700 Ah	3	40A	25A	•	160A	270A	150A	IP 21	41x30x21 cm	15,6 kg