

**Gysflash 30-24 HF is a high power stabilised supply (30A-12V & 15A-24V) incorporating Inverter technology with 5 functions :**

- **Battery support:** sustains 6, 12 and 24V (liquid or gel) automotive battery during diagnostic work
- **Advance battery charger:** ensures an ideal charging cycle for battery maintenance for the most modern vehicle
- **Showroom mode:** maintains batteries in showroom vehicles
- **In «battery change» mode,** will maintain electrical supply to preserve vehicle memory settings
- **High power stabilised supply:** voltage & current adjustable

## 5 Modes

- Charge
- Diagnostic
- Showroom
- Change battery
- Power Supply

## Advanced features

- Automatic restart
- Cable test and calibration
- Showroom mode lock
- "Easy charge" mode
- Activate and adjust an "expert" charging curve
- Automatic SOS recovery for sulphated battery



## Intuitive interface

8 Languages available

## Slim size

The height of the charger (<11cm) enables to place it under vehicle

## Cables

- Fitted with 2x2.5m - 6mm<sup>2</sup> cables
- It can be fitted with 2x5m - 16mm<sup>2</sup> and more. The calibration is automatic.

## TECHNOLOGY

High duty cycle

**94%**

15% more energy




No external ventilation  
=  
No dust ingress



**Inverter** - This technology enables :

- A better duty cycle for a light weight (3.8kg).
- Shock and vibration absorbing feet.

## FEATURES

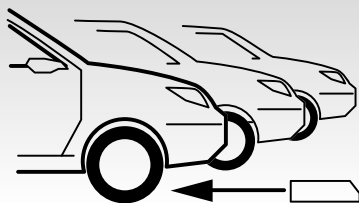

### Showroom Mode and reduced dimensions :

- Slim height (< 11 cm): to enable placement under vehicle.
- Showroom mode lock: to avoid mishandling ideal for garages and showrooms.
- Automatic restart: will automatically resume the mode from last position in case of power failure.

CE - EN 60335-2-29

50/60hz	540W	Imax 100% @40°C	6V	MIN. MAX. Ah	Charging Curve	BSU			Change Battery	IP	cm	kg		
						Diag	Diag+	Showroom						
230V		30A	6V	10-400Ah	IUoIoU	13.5V	6 > 7.4V		6.5V	40A	IP 21	25.5x23x10.5	3.8	
			12V				12 > 14.8V							12.9V
			24V				24 > 29.6V							
		15A	24V	10-200Ah										